(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 31 January 2002 (31.01.2002)

PCT

(10) International Publication Number WO 02/09413 A3

(51) International Patent Classification7:

G09G 5/36

- (21) International Application Number: PCT/EP01/07861
- (22) International Filing Date: 9 July 2001 (09.07.2001)
- (25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/219,917 21 July 2000 (21.07.2000) US 09/684,702 6 October 2000 (06.10.2000) US

- (71) Applicant (for all designated States except US): TELE-FONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): UNRUH, Erland [SE/SE]; Limhammsvägen 6b, S-217 59 Malmö (SE).
- (74) Agent: ERICSSON MOBILE PLATFORMS AB; S-221 83 Lund (SE).


- (81) Designated States (national): AE. AG. AL. AM. AT. AT (utility model). AU. AZ. BA. BB. BG. BR. BY. BZ. CA. CH. CN. CO. CR. CU, CZ. CZ (utility model), DE. DE (utility model). DK. DK (utility model). DM. DZ. EC. EE. (utility model). ES. FI, FI (utility model), GB. GD. GE. GH. GM. HR. HU. ID. IL. IN. IS. JP. KE. KG. KP. KR. KZ. LC. LK. LR. LS. LT. LU. LV. MA. MD. MG. MK, MN. MW. MX. MZ. NO. NZ. PL, PT. RO. RU. SD. SE. SG. SI. SK. SK (utility model). SL. TJ. TM. TR. TT. TZ, UA, UG. US. UZ. VN. YU. ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- (88) Date of publication of the international search report: 16 May 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR PRODUCING PICTURES WITHIN A TEXT DISPLAY OF A MOBILE DEVICE

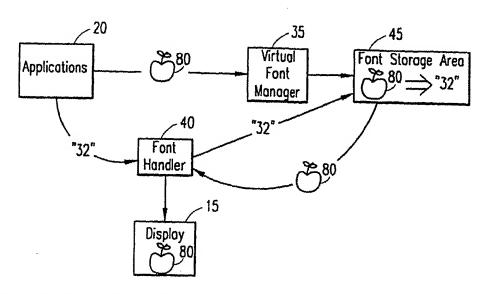

(57) Abstract: A mobile device for displaying pictures on a display. The mobile device includes at least one application for generating a bitmap image of the picture and a display for displaying the picture. The bitmap image is provided to a font system which stores the bitmap image of the picture with an associated character value. The bitmap image may be retrieved by providing the character value to the font system and using the bitmap image to generate the picture on the display.



02/09413 A3

INTERNATIONAL SEARCH REPORT

International application No. PCT/EP 01/07861

A (1) A (1) (1) (1) (1) (1) (1) (1) (1) (1) (1)				
A. CLASSIFICATION OF SUBJECT MATTER	R			
IPC7: G09G 5/36 According to International Patent Classification (IPC) or	to both national classification and IPC			
B. FIELDS SEARCHED				
Minimum documentation searched (classification system	followed by classification symbols)			
IPC7: G09G, H04N				
Documentation searched other than minimum document	ation to the extent that such documents are included	in the fields scarched		
Electronic data base consulted during the international se	arch (name of data base and, where practicable, searc	ch terms used)		
EPO-INTERNAL, WPI DATA				
C. DOCUMENTS CONSIDERED TO BE REL	EVANT			
Category* Citation of document, with indication,	where appropriate, of the relevant passages	Relevant to claim No.		
A EP 0700197 A1 (ADOBE SYST) (06.03.96)	EP 0700197 A1 (ADOBE SYSTEMS INC), 6 March 1996 (06.03.96)			
-	-			
A EP 0646900 A1 (FIRMA ERIKA (05.04.95)	EP 0646900 A1 (FIRMA ERIKA KÖCHLER), 5 April 1995 (05.04.95)			
	-			
				
·				
Further documents are listed in the continuation	on of Box C. X See patent family annex	ζ.		
Special categories of cited document: A" document defining the general state of the art which is not considered to be of particular relevance "I" later document published after the international filing date or prior date and not in conflict with the application but cited to understand the principle or theory underlying the invention.				
	filing date The document of particular relevance: the claimed invention cannot be considered to involve an invention of the considered to involve an invention cannot be considered to inve			
cited to establish the publication date of another citation or special reason (as specified) Of document referring to an oral disclosure, use, exhibition or	other "Y" document of particular relevance; the	claimed invention cannot be		
"P" document published prior to the international filing date but the priority date claimed	combined with one or more other such being obvious to a person skilled in th	documents, such combination e art		
Date of the actual completion of the international so	patent			
11 January 2002	2 8. 01. 2002			
ame and mailing address of the International Searching Authority	Authorized officer			
IL-2280 HV Rijswijk el(+31-70)340-2040, Tx 31 651 epo nl. ax(+31-70)340-3016	Jan Silfverling/LR			
form PCT/ISA/210 (second sheet) (July 1998)	Telephone No.			

INTERNATIONAL SEARCH REPORT

Information on patent family members

06/11/01

International application No.
PCT/EP 01/07861

	ent document n search report		Publication date		Patent family member(s)	Publication date
EP	0700197	A1	06/03/96	DE JP US US US CA	69517564 D,T 8190604 A 5625711 A 5729637 A 5999649 A 2157250 A	08/03/01 23/07/96 29/04/97 17/03/98 07/12/99 01/03/96
EP	0646900	A1	05/04/95	NONE		

Form PCT/ISA/210 (patent family annex) (July 1998)

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 31 January 2002 (31.01.2002)

PCT

(10) International Publication Number WO 02/09413 A2

(51) International Patent Classification⁷: H04N 1/00

(21) International Application Number: PCT/EP01/07861

(22) International Filing Date: 9 July 2001 (09.07.2001)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/219,917 09/684,702 21 July 2000 (21.07.2000) US 6 October 2000 (06.10.2000) US

- (71) Applicant (for all designated States except US): TELE-FONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): UNRUH, Erland [SE/SE]; Limhammsvägen 6b, S-217 59 Malmö (SE).
- (74) Agent: ERICSSON MOBILE PLATFORMS AB; S-221 83 Lund (SE).

- (81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



METHOD AND APPARATUS FOR PRODUCING PICTURES WITHIN A TEXT DISPLAY OF A MOBILE DEVICE

BACKGROUND OF THE INVENTION

5

10

15

20

25

30

Technical Field of the Invention

The present invention relates generally to mobile device displays, and more particularly, to the display of pictures with text within a mobile device display.

Description of Related Art

As the use of mobile devices becomes more prevalent within the marketplace, the various functionalities offered by mobile devices have greatly expanded. The display of e-mail messages and surfing the Internet using WAP protocols are only some of the applications that are now being performed by mobile devices. As the number of applications and uses for mobile devices increases, the requirements desired from the display of the mobile terminal have increased accordingly.

Wherein previously only the display of simple text messages was required by the displays of mobile devices, increased uses of services such as e-mail and web-browsing have created a need for the mobile device display to provide both text and pictorial information upon the display. This creates quite a problem due to the complexity inherent in the general nature of display of text with pictures or pictures alone. This arises in large part from the limited resources available in a mobile device with respect to memory and CPU computing power. Therefore, a need exists for a manner to more efficiently display pictures within the display of a mobile device.

SUMMARY OF THE INVENTION

5

10

15

20

25

30

The present invention overcomes the foregoing and other problems with a mobile device capable of displaying a picture along with text on the display of the mobile At least one application within the mobile device can generate a bitmap image of a picture which is desired to be displayed at some point. This bitmap image is provided to a font system within the mobile device which stores the bitmap image of the picture within a font storage area and associates a selected character value with the stored bitmap image. The bitmap image may be retrieved from the font storage area responsive to provision of the associated character value to the font The retrieved bitmap image may be then used to system. generate the picture upon the display of the mobile device.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a block diagram illustrating a mobile device configured to display both pictures and text upon the display of the mobile device according to the present invention;

FIGURE 2 is a functional block diagram of the system for displaying pictures within the mobile device;

FIGURE 3 illustrates the process of the present invention; and

FIGURE 4 is a flow diagram illustrating the process performed by the system of FIGURE 2.

DETAILED DESCRIPTION

5

10

15

20

25

30

Referring now to the drawings, and more particular to FIGURE 1, there is illustrated a mobile device 10 implementing the functionality necessary to pictures within a display 15 of the mobile device 10. The mobile device 10 may comprise a mobile telephone, laptop computer, PDA, pager, or any other electronic device having a display. Applications 20 within the mobile device 10 include picture generation functionalities 25 providing the ability to generate bitmap images of pictures and modify fonts within the font system 30 of the mobile device in run time. Alternatively, the bitmap images could be directly input to mobile terminal via an external port (not shown), or downloaded from an external network such as the Internet. A bitmap defines a display space and the color for each pixel or "bit" in the display space. GIF and a JPEG are examples of graphic image file types that bitmaps. A bitmap does not need to contain a bit of color-coded information for each pixel on every row. only needs to contain information indicating a new color as the display scans along a row. Thus, an image with much solid color will tend to require a small bit map.

The font system 30 includes a font manager 35, font handler 40 and font storage area 45. The font manager 35 receives instructions from the picture generating functionality 25 in order to store a bitmap of a provided picture. Within existing mobile devices, most font systems 30 include a number of fonts which are stored within the font storage area 45. Each character of a font is individually stored within the font storage area 45. Each of these stored characters comprises a stored bitmap image of the character. Within the present

invention, the font manager 35 receives a provided bitmap from the picture generating functionality 25 and stores this provided bitmap within the font storage area 45. The stored bitmap 50 of the picture is referred to as a virtual font. The stored bitmap 50 for the picture has a character value associated therewith by the font manager 35.

5

10

15

20

25

30

example of a system for identifying characters is the Unicode system. The Unicode standard is the universal character and coding standard used for the recordation of text for computer processing. Unicode system provides a format wherein a unique number associated with every character of virtually any The standard uses a default 16 bit encoding language. that provides code points for more than 65,000 The Unicode standards also provides for an characters. extension mechanism that enables encoding for as many as one million additional characters without the use of complex modes or escape codes. The standard also reserves the 6,400 code values for private use in the normal format and 131,068 code values for private use within the extended coding scheme. These areas reserved for private use might be utilized for storing codes for bitmap images of pictures rather than for characters according to the present invention.

The character values provided by the font manager 35 may utilize the full range of characters in the font (for Unicode this range is roughly 0-65535) or use a restricted code range within a "private area". The advantage of using a private area is that text handling routines implemented within the font manager 35 normally have different code ranges categorized with characters having characteristics that a picture would not have. By

5

10

15

20

25

30

selecting a private area for designation of the picture fonts, the private area may be free of any undesired characteristics.

By providing the associated character value, the picture stored within the font storage area 45 may be retrieved by the font handler 40 and provided to the display control 55 for generation of the picture on the display 15. The font handler 40 retrieves the required fonts from font storage area 45 and provides them to the display 55. The font handler 40 must have the capability to handle different sized characters (width, height, proportional text). The font handler 40 accesses the stored bitmaps 50 of the pictures within the font storage area 45 responsive to the character values described previously.

Referring now to FIGURE 2, wherein there is provided an illustration of the functional operation of the present invention with the mobile device. The application 20 within the mobile device 10 can either store or remove pictures from the font storage area 45 (FIGURE 1) by accessing the font manager 35. The font manager 35 stores the bitmap images for the virtual font 50 along with other fonts 65 for normal text characters within the font storage area 45.

The applications 20 may request the display of the stored virtual font 50 by accessing the text handling routines 70. The text handling routines 70 process the various character values provided by the applications 20 and forward these to the layout routine 75. The layout routine 75 accesses the font handler 40 to request that the particular font identified by the character value be provided to the layout routine 75. The layout routine 75 will also configure the width and height of the desired

5

10

15

20

25

30

font. The layout routine 75 provides the layout (i.e., orientation, spacing, etc.) for the indicated text and/or pictures and provides these to the drawing routine 80. The drawing routine 80 uses the information from the layout routine 75 and the received bitmap images of the requested fonts from the font handler 40 to draw the text and/or pictures requested by the applications 20. The drawing routine 80 forwards the rendered information to the display 15 to be displayed to a user. Likewise, the application 20 may request removal of a font 50. In this case the request for removal is merely forwarded to the font handler and the font manager 35 removes the bitmap from the font storage area 45.

Referring now to FIGURE 3, there is provided a general illustration of the above described process. A picture 80 of an apple is provided from the applications 20 to the virtual font manager 35 which stores this information within the font storage area 45. The character value of "32" is associated with the picture of the apple. The applications 20 next requests display of the apple picture 80 by providing the character value "32" to the font handler 40 and the font handler 40 provides the bitmap image of the stored apple which may then be displayed on display screen 15.

Referring now to FIGURE 4, there is illustrated a flow diagram of the process of the present invention. Mobile device application 20 provides at step 90 a bitmap picture to the font manager 35. The font manager 35 stores at step 95 the provided picture as a virtual font character 50 within the font storage area 45. The font manager 35 also associates at step 100 a particular character value with the stored bitmap picture so that the bitmap picture may be recalled at a later time. The

5

10

15

20

virtual font manager 35 notifies the applications at 105 of the generated character value so that they may access the stored bitmap at a later time. The applications 20 provide at step 110 the character value associated with the bitmap picture in order to request its display. Responsive to the provided character value, the bitmap for the indicated virtual font 50 is retrieved by the font handler 40 from the font storage area 45 at step 115 and is provided to the display 15 such that the picture can be generated at step 120.

Using the above described system and pictures may be displayed utilizing already existing text handling routines within the mobile device. The pictures are able to enter the text handling function disquised as normal characters such that the system works differently that when displaying normal text. Likewise, the pictures will automatically end up mixed with text since the picture is merely displayed as character.

The previous description is of a preferred embodiment for implementing the invention, and the scope of the invention should not necessarily be limited by this description. The scope of the present invention is instead defined by the following claims.

WHAT IS CLAIMED IS:

1. A method for generating pictures on a display a mobile device comprising the steps of:

storing a bitmap image of a picture at a first storage location;

associating a character value with the stored bitmap image;

retrieving the stored bitmap image of the picture using the character value; and

generating the picture on the display of the mobile device using the retrieved bitmap image.

2. The method of Claim 1, further comprising the steps of:

generating the bitmap image within an application of the mobile device; and

forwarding the generated bitmap image to a font manager.

3. The method of Claim 1, further comprising the steps of:

generating a request for removal of the stored bitmap image of the picture; and

removing the stored bitmap image of the picture from the first storage area.

4. The method of Claim 1, wherein the step of storing further comprises the step of storing the bitmap image of a picture at a text font storage area.

5

10

15

20

The method of Claim 1, wherein the step of retrieving further comprises the step of providing the character value from an application within the mobile device to a font handling routine.

5

6. The method of Claim 1, wherein the character value comprises a character value associated with a font.

10

The method of Claim 1, further comprising the steps of displaying text along with the picture.

15

8. The method of Claim 7, wherein the step of displaying further comprises the step of:

providing at least one second character value

associated with a text character;

least one second character value; and

retrieving the text character responsive to the at

generating the text character on the display.

20

9. The method of Claim 1, wherein the mobile device comprises a mobile telephone.

10. A method for generating pictures on a display a mobile device comprising the steps of:

generating the bitmap image within an application of the mobile device; and

forwarding the generated bitmap image to a font manager;

5

10

15

20

25

30

storing the bitmap image of a picture at a text font storage area;

associating a character value with the stored bitmap image;

providing the character value from an application within the mobile device to a font handling routine;

retrieving the stored bitmap image of the picture using the provided character value; and

generating the picture on the display of the mobile device using the retrieved bitmap image.

11. The method of Claim 10, further comprising the steps of:

generating a request for removal of the stored bitmap image of the picture; and

- 12. The method of Claim 11, wherein the character value comprises a character value associated with a font.
- 13. The method of Claim 11, further comprising the steps of displaying text along with the picture.

14. The method of Claim 11, wherein the step of displaying further comprises the step of:

providing at least one second character value associated with a text character;

retrieving the text character responsive to the at least one second character value; and

generating the text character on the display.

5

10

15

20

25

- 15. The method of Claim 10, wherein the mobile device comprises a mobile telephone.
- 16. A mobile device capable of displaying a picture on a display, comprising:
- at least one application for generating a bitmap image of the picture;
- a display for displaying the bitmap image of the picture; and
- a font system for storing the bitmap image of the picture and associating a character value therewith and for providing the bitmap image to the display responsive to the character value.
- 17. The mobile device of Claim 14, wherein the font system further comprises:
- a font storage area for storing the bitmap image of the picture;
- a font manager for associating the character value with the stored bitmap image; and
- a font handler for retrieving the bitmap image from the font storage area responsive to the character value.

18. The mobile device of Claim 15, wherein the font handler further retrieves a second bitmap image associated with a text character from the font storage area responsive to a second character value.

5

19. The mobile device of Claim 14, further including at least one application for generating a request to remove the stored bitmap image.

10

20. The mobile device of Claim 14, wherein the font system removes the bitmap image responsive to the request to remove.

15

21. The mobile device of Claim 14, wherein the font system further stores bitmap images of text characters and associates character values therewith.

The mobile device of Claim 14, wherein the

20

23. The mobile device of Claim 14, wherein the mobile devise comprises a mobile telephone.

character value comprises a character value normally

associated with a text font.

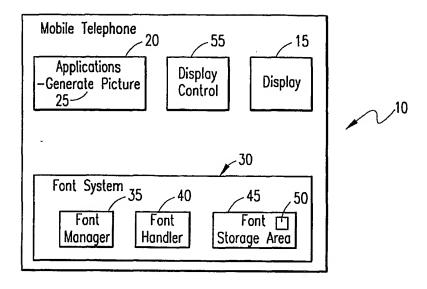
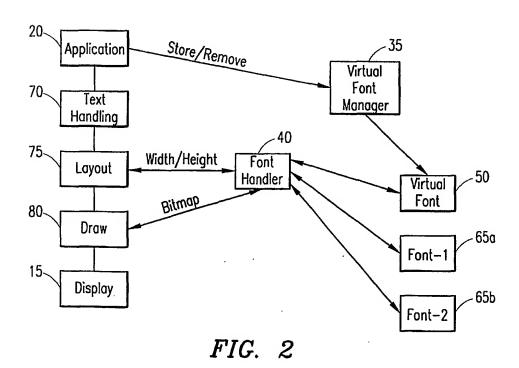


FIG. 1



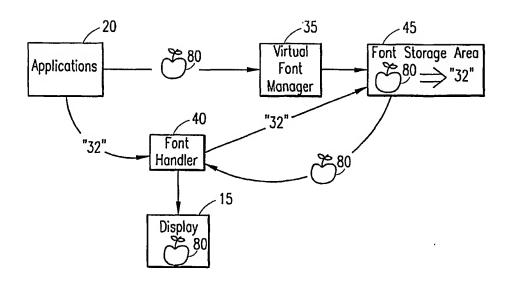


FIG. 3

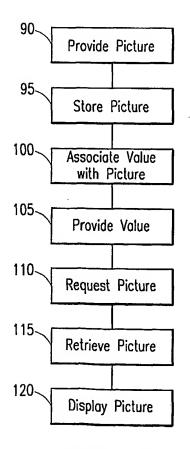


FIG. 4